



Précision

CARBURE CARBIDE
Metallo duro




≈ DIN 8089-C

Trous borgnes


Blind holes

Agujeros ciegos

Per fori ciechi

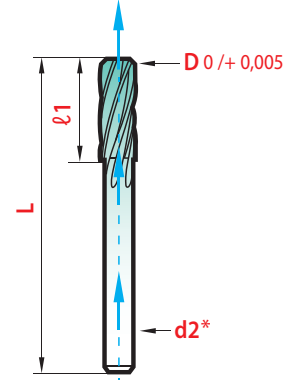

magafor standard

 D 0,1 mm	L	l1	d2 h6	magaforce 8675
2,98 - 2,99	56	20	4	119,00 €
3,0	56	20	4	115,00 €
3,01 - 3,02	56	20	4	119,00 €
3,98 - 3,99	56	20	4	100,95 €
4,0	56	20	4	98,55 €
4,01 - 4,02	56	20	4	100,95 €
4,98 - 4,99	63	22	4*	102,20 €
5,0	63	22	4*	99,75 €
5,01 - 5,02	63	22	4*	102,20 €
5,98 - 5,99	63	22	5*	109,45 €
6,0	63	22	5*	107,05 €
6,01 - 6,02	63	22	5*	109,45 €
7,98 - 7,99	71	25	6*	128,95 €
8,0	71	25	6*	124,05 €
8,01 - 8,02	71	25	6*	128,95 €
9,98 - 9,99	71	25	8*	158,10 €
10,0	71	25	8*	152,05 €
10,01 - 10,02	71	25	8*	158,10 €
11,98 - 11,99	80	28	10*	214,05 €
12,0	80	28	10*	205,55 €
12,01 - 12,02	80	28	10*	214,05 €

- Arrosage central : le lubrifiant est projeté dans le trou à aléser,
- Hélice à droite : favorise la remontée des copeaux et du lubrifiant.
- *Queue réduite pour le décolletage.
- Central oil feeding : the lubricant is fed directly into the hole to ream,
- right hand spiral : improved removal of swarf and coolant.
- *Reduced shank for decolletage.
- Alimentación de aceite central : el lubricante es dirigido hacia el agujero a escariar.
- Hélice a derechas : facilita la salida de la viruta y el lubricante.
- *Cola reducida para el desprendimiento.
- Lubrificazione centrale : il refrigerante viene diretto nel foro da alesare,
- Elica destra e *codolo ridotto : favoriscono l'uscita dei trucioli e del refrigerante.

performances

 **p. 149**