




PRODUCT INFORMATION



The **XPLR+ H plus 3 cutting edges for windows frame** is designed for **precise drilling of window and door frames**. Thanks to its reinforced zone, it can absorb **slight bending without breaking**, ensuring clean and controlled work. Its **self-centering tip**, **short half-round helix**, and **single-piece carbide tip** guarantee **optimal precision** and **excellent resistance** for intensive use.

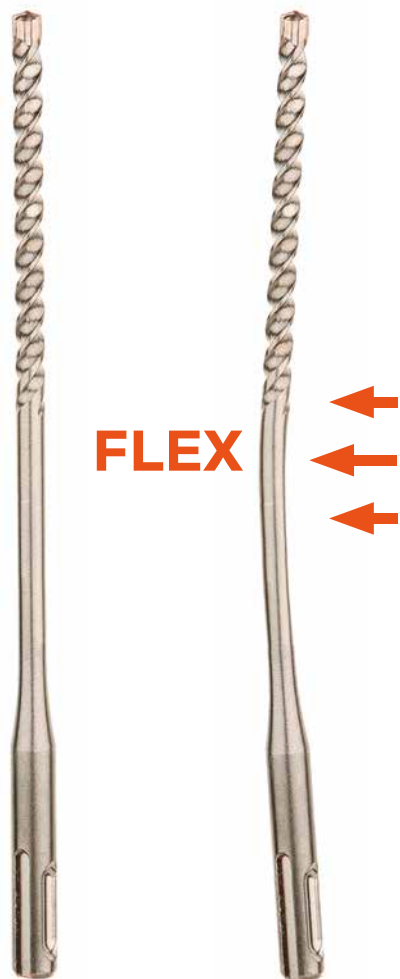

APPLICATIONS





Resistant to bending



TECHNICAL SPECIFICATIONS

- **150° blade angle:**
Ensures fast and smooth penetration while reducing vibrations for greater drilling comfort.
- **Self-centering tip:**
Guarantees precise start-up without deviation, ideal for perfectly aligned holes.
- **Exclusive reinforcement zone:**
Allows the drill bit to withstand slight bending without breaking, making it easier to adjust door frames.
- **Optimized helix:**
Improves dust removal, preventing jamming and ensuring smooth progress.
- **SDS-plus compatibility:**
Suitable for all SDS-plus hammer drills, ensuring versatile and high-performance use on construction sites.

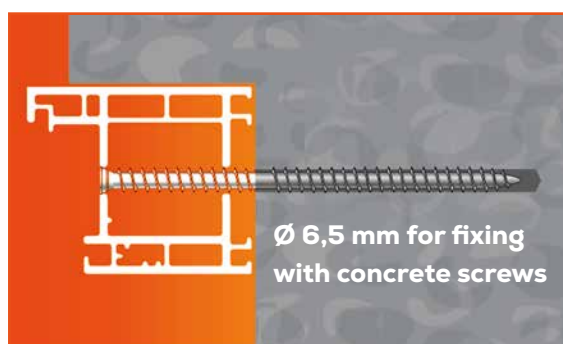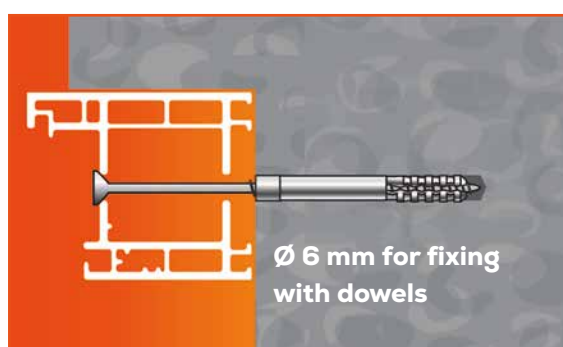

LT	LC	Ø	REF	GENCOD
210	150	6,5	PPA003302100650	3221912390646
260	200	6	PPA003302600600	3221912394026
		6,5	PPA003302600650	3221912394033
310	250	6,5	PPA003303100650	3221912394040