


Wave formed, Roughing, for aluminium

MG
 Uncoated
 Super Micrograin Carbide
Tolerance
 D 6,0 - 7,0 +0 / -0,025
 D 8,0 - 9,0 +0 / -0,030
 D 10,0 - 12,0 +0 / -0,035
Shank
 Cylindrical h6, DIN6535 HA
Flute
 45° right hand spiral, center cutting
Field of application
 Aluminium

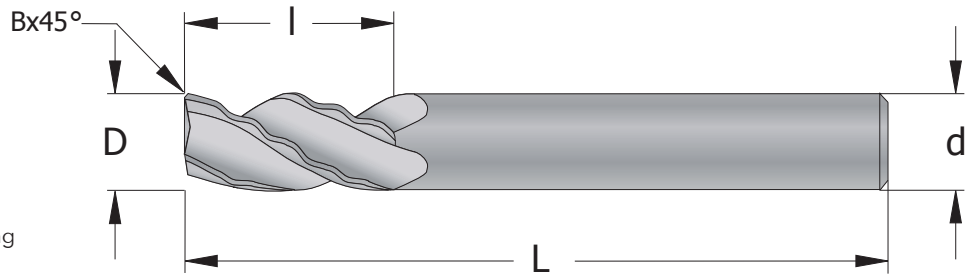

D mm	d mm	B mm	Part Number	l mm	L mm	No. of Flutes
6,0	6	0,2	FWA0606C16_MG	16	57	3
8,0	8	0,25	FWA0808C20_MG	20	63	3
10,0	10	0,3	FWA1010C25_MG	25	72	3
12,0	12	0,3	FWA1212C30_MG	30	83	3

*Small chamfer gives
longer tool life*

*Deep flute
for aluminium*

*Wave formed cutting edge
gives high productivity*

