



# Alu-titane

## Alu-titan

Alu-titanio  
Alluminio-titanio

### Hélice 45° - Forte dépouille

Pour des matières ductiles et abrasives.

### 45° Spiral - Special relieving


For tensile and abrasive materials.

### Hélice 45° - Destalonado positivo

Para materiales dúctiles y abrasivos.


### Elica 45° - Spoglia accentuata

Per materiali duttili ed abrasivi.



$$\ell = 2,5 \sim 3 \times D$$

D	L	ℓ	d2	magaforce 8528	Alu-Titane 8528-AL
-0,01			h5		
0,5	39	1,5	3	43,00 €	50,60 €
0,6	39	1,5	3	44,30 €	51,85 €
0,8	39	2	3	45,55 €	53,15 €
1,0	39	3	3	48,10 €	55,70 €
1,2	39	4	3	49,35 €	56,95 €
1,5	39	4	3	50,60 €	58,20 €
2,0	39	5	3	54,40 €	62,00 €
2,5	39	7	3	60,75 €	68,30 €

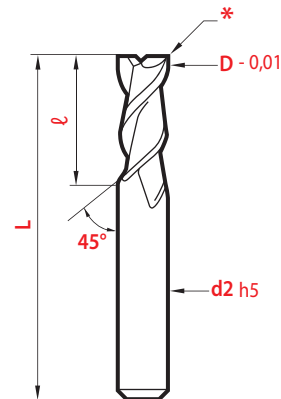

\* 0,05 x D  
 Chanfrein de renfort frontal dépouillé  
 Relieved frontal reinforcement chamfer  
 Chafilán de refuerzo en destalonado frontal  
 Bordino di rinforzo frontale spogliato

#### CONDITIONS D'UTILISATION CONDICIONES DE CORTE PARA

#### RECOMMENDATIONS FOR THE USE CONDIZIONI DI IMPIEGO

∅	Vc	n	fz	vf
0,5	150 ~ 200	95000	0,01	1900
1		50000	0,015	1500
2		28000	0,03	1680
4		16000	0,06	1920